


Torque Meter **LR-Cal/ LFC 80** - bench type e.g. for calibration of torque wrenches

- Ranges from 0...0.5 Nm to 0...2000 Nm
- You can select from 9 torque measuring units
- Accuracy $\pm 0.20\%$ FS
- Incl. ACCREDIA (DAkKS) certificate *) from 1/10 of range for clockwise direction
Total uncertainty $\leq 1\%$ FS
Optional additional ACCREDIA (DAkKS) certificate *) for counter-clockwise direction
- PEAK function for exact detection of the „snap-point“ (clockwise and counter-clockwise direction)
- Programmable „First Peak“ detection
- Optional: with data logging function

*) Ranges 0...0.5 Nm and 0...2.5 Nm: incl. factory certificate of calibration.



The **LR-Cal/ LFC 80** is a torque bench for static measurements, composed of a digital indicator and a strain gauge torque, extremely rugged and compact with a precision better than 0.20%. It is ideal for the calibration and control of torque wrenches, screwdrivers, direct reading and snap. The indicator is powered by a Li-Ion rechargeable battery with an autonomy of 80 hours, with the AUTO POWER OFF function, which occurs when there are not changes in measurements for a programmable period of time.

It allows in static mode a very high resolution and in PEAK mode an acquisition frequency of 4800 Hz (4800 measurements per second).

The instrument and PEAK functions are working in clockwise direction as well as in counter-clockwise direction.

The display of the **LR-Cal/ LFC 80** can be rotated by 90° to be able to work both, horizontally and vertically (using the optional 90° bracket).

The device is equipped with an USB 2.0 interface with a transmission rate of 4800 values per second in PEAK mode. A programmable „First PEAK“ function makes it easy to avoid mistakes during calibration of torque wrenches.

Several **LR-Cal/ LFC 80** in mechanical support, code **LFC-ATC-1000**



LR-Cal/ LFC 80 in optional case, code **LFC-KOFFER**

Available pressure ranges:

Order-Code **LFC80-8050**: 0...0.5 Nm
Order-Code **LFC80-0002**: 0...2.5 Nm
Order-Code **LFC80-0005**: 0...5 Nm
Order-Code **LFC80-0010**: 0...10 Nm
Order-Code **LFC80-0025**: 0...25 Nm
Order-Code **LFC80-0050**: 0...50 Nm

Order-Code **LFC80-0100**: 0...100 Nm
Order-Code **LFC80-0250**: 0...250 Nm
Order-Code **LFC80-0500**: 0...500 Nm
Order-Code **LFC80-1000**: 0...1000 Nm
Order-Code **LFC80-2000**: 0...2000 Nm

Technical Data:

Total uncertainty acc. EURAMET cg-14:	1% (from 10% to 100% of the range)
Linearity and hysteresis:	$\leq \pm 0.20\%$ FS
Internal resolution:	24 bit
Normal mode measuring rate:	10 measurements per second
PEAK mode measuring rate:	4800 measurements per second
Reference temperature:	23°C
Operating temperature:	0...50°C
Storage temperature:	-10...+60°C
Temperature influence per 10°C:	zero point: $\leq \pm 0.015\%$ sensitivity: $\leq \pm 0.005\%$

Display (LCD):
Figure height 16 mm
Backlight 1...60 sec. Programmable
Colour of backlight:blue
additional analogue bargraph indication



Programmable resolution:	1, 2, 5, 10
Programmable digital filter:	von 0 bis 10 (im Normalmodus)
ZERO function:	working up to 100% FS
PEAK function:	Clockwise and counter-clockwise direction
Programmable "First PEAK" function:	from 1 to 99% FS
Programmable PEAK Auto-Reset:	Deletes PEAK values after programmable period of time
Auto POWER OFF function:	from 1 to 30 min, if measured value remains unchanged
Key Block function:	Avoids parameter changes by unauthorised personnel
Measuring units (torque):	kNm, Nm, Ncm, daNm, kgf m, ozf ft, lbf ft, ozf inch, lbf inch
Communication interface:	USB 2.0
Continuous transmission via USB:	4800 values per second
Data transmission:	On request (key press)
Max. USB cable length:	5 meters
Power supply:	Built-in chargeable Li-Ion battery size 14500 3,6 V
Battery charging:	via USB interface
Typ. operating time when fully charged:	approx. 80 hours
Typical charging time:	approx. 8 hours
Mechanical connection ISO 1174-1:	Square (female) Ranges 0,5 / 2,5 / 5 / 10 Nm: 1/4" Ranges 25 / 50 Nm: 3/8" Ranges 100 / 250 Nm: 1/2" Ranges 500 / 1000 Nm: 3/4" Range 2000 Nm: 1"
Max. working load:	up to 100% FS
Max. overload limit:	up to 150% FS
Burst load:	>300% FS
Housing protection degree:	IP 40 acc. EN 60529
Housing material:	Aluminium and steel, black coated
Sensor material:	Stainless steel 17-4 PH

Display Resolutions:

Nominelles Drehmoment Nominal Torque		Anzeige Display	Auflösung Resolution	Anzeige Display	Auflösung Resolution	Anzeige Display	Auflösung Resolution	Anzeige Display	Auflösung Resolution	Anzeige Display	Auflösung Resolution
Artikel / Code	Nm	Nm		kNm		Ncm		daNm		kgf m	
LFC80-8050	0,5	0,5000	0,0001	0,0005	0,0001	50,000	0,010	0,0500	0,0001	0,0500	0,0001
LFC80-0002	2,5	2,5000	0,0005	0,0025	0,0001	250,00	0,052	0,2500	0,0001	0,2500	0,0001
LFC80-0005	5	5,000	0,001	0,0050	0,0001	500,00	0,10	0,5000	0,0001	0,5000	0,0001
LFC80-0010	10	10,000	0,002	0,0100	0,0001	1000,0	0,2	1,0000	0,0002	1,0000	0,0002
LFC80-0025	25	25,000	0,005	0,0250	0,0001	2500,0	0,5	2,5000	0,0005	2,5000	0,0005
LFC80-0050	50	50,00	0,01	0,0500	0,0001	5000,0	1,0	5,0000	0,0010	5,0000	0,0010
LFC80-0100	100	100,00	0,02	0,1000	0,0001	10000	2	10,000	0,002	10,000	0,002
LFC80-0250	250	250,00	0,05	0,2500	0,0001	25000	5	25,000	0,005	25,000	0,005
LFC80-0500	500	500,0	0,1	0,5000	0,0001	50000	10	50,000	0,010	50,000	0,010
LFC80-1000	1000	1000,0	0,2	1,0000	0,0002	---	---	100,00	0,02	100,00	0,02
LFC80-2000	2000	2000,0	0,5	2,0000	0,0005	---	---	200,00	0,05	200,00	0,05

Nominelles Drehmoment Nominal Torque		Anzeige Display	Auflösung Resolution	Anzeige Display	Auflösung Resolution	Anzeige Display	Auflösung Resolution	Anzeige Display	Auflösung Resolution
Artikel / Code	Nm	ozf ft		lbf ft		ozf inch		lbf inch	
LFC80-8050	0,5	5,9000	0,0020	0,4000	0,0001	71,000	0,020	5,000	0,001
LFC80-0002	2,5	29,500	0,010	2,0000	0,0005	355,00	0,10	25,000	0,005
LFC80-0005	5	59,000	0,020	4,0000	0,0010	710,00	0,20	50,000	0,010
LFC80-0010	10	118,00	0,05	8,0000	0,0020	1420,0	0,5	100,00	0,05
LFC80-0025	25	295,00	0,10	20,000	0,005	3550,0	1,0	250,00	0,05
LFC80-0050	50	590,00	0,20	40,000	0,010	7100,0	2,0	500,0	0,1
LFC80-0100	100	1180,0	0,5	80,000	0,020	14200	5	1000,0	0,2
LFC80-0250	250	2950,0	1,0	200,00	0,05	35500	10	2500,0	0,5
LFC80-0500	500	5900,0	2,0	400,00	0,1	71000	20	5000,0	1,0
LFC80-1000	1000	11800	5	800,00	0,2	---	---	10000	2
LFC80-2000	2000	323600	5	1600,0	0,5	---	---	20000	5

Options (extra charge):

Code **LFC80-DLOG**

Datenlogger-Funktion, kann in zwei Modi arbeiten:

- Automatisch: Zyklische Aufzeichnung (programmierbar 1 s bis 10 h) im Normalmodus
- Manuell: Aufzeichnung auf Tastendruck im PEAK-Modus

60.000 Messwerte Kapazität, integrierte Echtzeituhr YY-MM-DD-HH-MM-SS

Die aufgezeichneten Messwerte können am Gerät angezeigt werden oder via USB an einen PC/Laptop übertragen werden (mit optionaler Software).

Code **LFC80-RS232**

If distance between **LR-Cal** LFC 80 and PC/Laptop is larger than 5 m, the optional RS232 interface is to be used (max. 15 m cable length).

RS232C, 19200, 9600 or 4800 baud, transmission on software command, connection DB9 female on backside of housing. Cable code **LFC-RS232-KAB** recommended.

Code **LFC-RS232-USB**

USB-/RS232 converter for connection to PC/Laptop.

Code **LFC-HALTER**

Bracket 90° for vertical mounting

Code **LFC80-KOFFER**

Transit case with custom foams

Code **LFC80-L-AZERT**


For ranges >2.5 Nm: ACCREDIA (DAkKS) certificate for counter-clockwise direction (Such certificate for clockwise direction is included in scope of standard delivery)



LFC 80 Torque Meter - bench type **LR-Cal** LFC 80 Calibration ranges 0.5 to 2000 Nm



Dimensions:

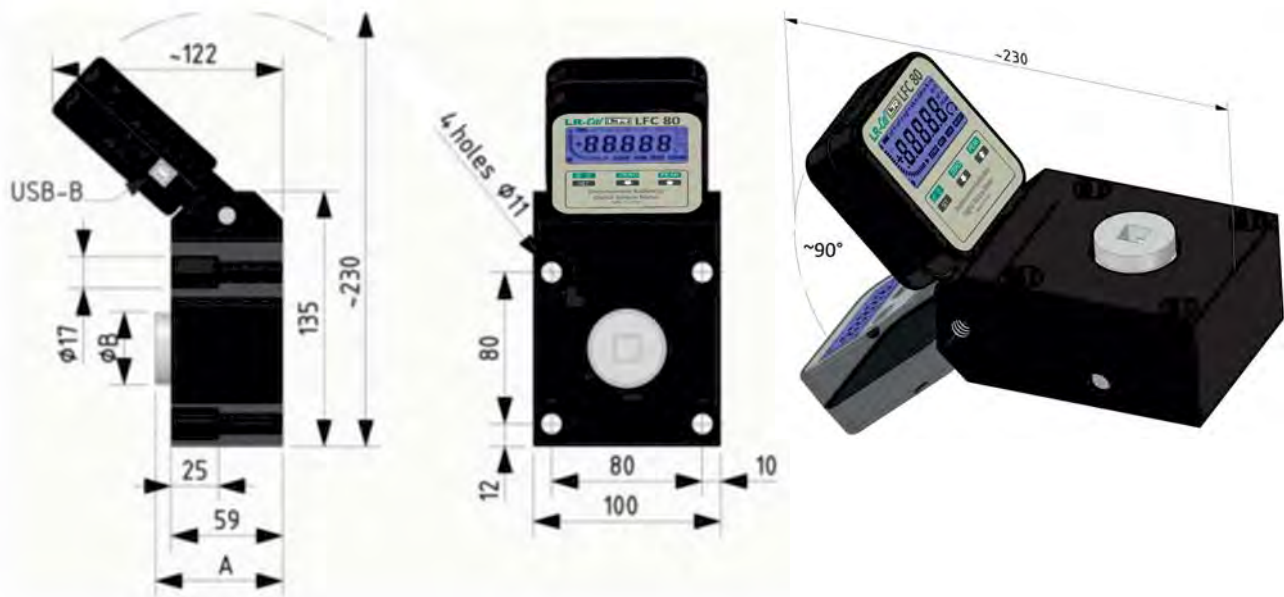

The display is adjustable in a range of about 90°.



For vertical mounting use
the optional 90° bracket
Order-Code **LFC-HALTER**

Mounting of a **LR-Cal** LFC 80
on a bench




USB cable and
USB charger are included
in scope of standard
delivery.

Explanation of the „First PEAK“ function:

The „First PEAK“ function keeps on the display the first PEAK hooked, even if subsequently the torque increases. This feature helps the inexperienced operator in the calibration of torque wrenches, because it keeps displayed the correct PEAK torque value, even if the operator inadvertently does not stop and continues to act on the torque wrench doing increase torque. Using this feature, the measure is more repeatable and less influenced by the operator, especially when keys are used with very low shooting angle.

If the „First PEAK“ detection is activated, the value P3 is not considered as PEAK value, and also not value P1, because the decreasing torque $\Delta 1$ after value P1 is less than the previously in the LR-Cal LFC 80 instrument predefined threshold value.

Torque value P2 is taken as PEAK value, because the decreasing torque value $\Delta 2$ after value P2 is larger than the previously in the LR-Cal LFC 80 instrument predefined threshold value.

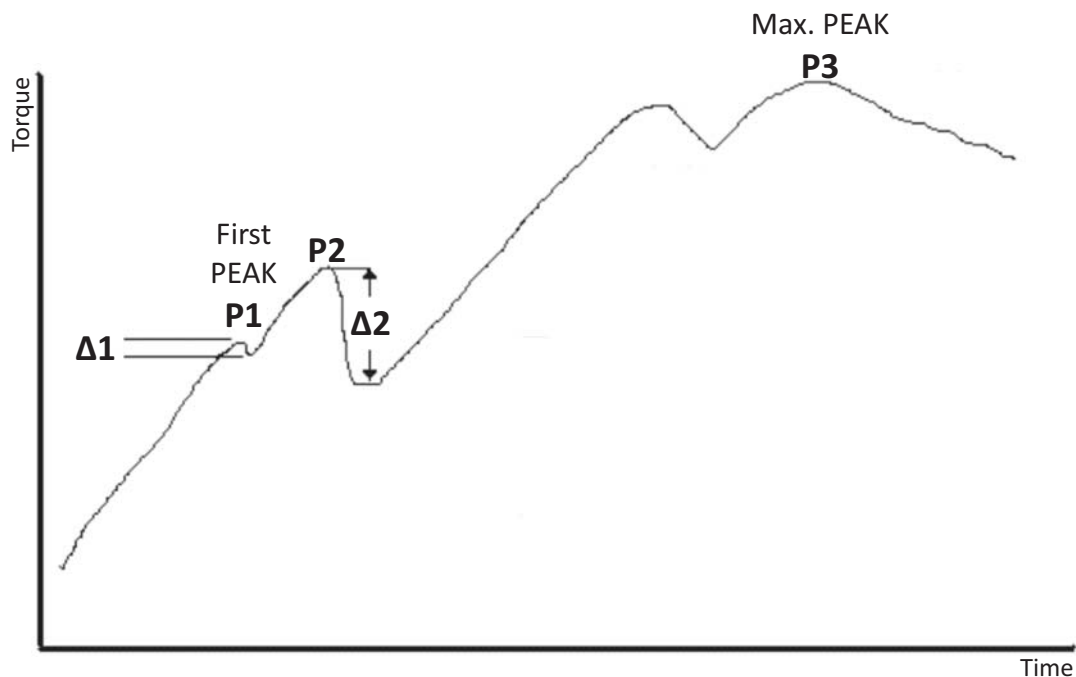

Checking and Calibration of Torque Wrenches

according to norm EN ISO 26789 and guideline EURAMET cg-14

For a constant and repeatable calibration of torque wrenches we recommend the optional mechanical support LR-Cal LFC-ATC.



LR-Cal/ LFC-ATC mechanical support

with double linear guide for the calibration and control of release or direct reading keys which allows the application of the load in a gradual and continuous way, by respecting the reference norm EN ISO 26789 (2004).



Order-Code **LFC-ATC-1000** for torques up to 1000 Nm, incl. 1 base plate for 1 **LR-Cal/ LFC 80**

Order-Code **LFC-ATC-2000** for torques up to 2000 Nm, incl. 1 base plate for 1 **LR-Cal/ LFC 80**


If the mechanical support **LR-Cal/ LFC-ATC** shall be equipped with further **LR-Cal/ LFC 80** instruments, you can increase the calibration range of your equipment.

For each additional **LR-Cal/ LFC 80** you need an additional base plate, order-code **LFC-PLATTE**.

Example: to cover a range of 1 to 1000 Nm in class 1 you need three **LR-Cal/ LFC 80** instruments, to be mounted into the **LR-Cal/ LFC-ATC** support:

- 1 x range to 10 Nm, code **LFC80-0010**
- + 1 x range 100 Nm, code **LFC80-0100**
- + 1 x range 1000 Nm, code **LFC80-1000**
- + 2 x additional base plates, code **LFC-PLATTE**
- + 1 x **LR-Cal/ LFC-ATC**, code **LFC-ATC-1000**

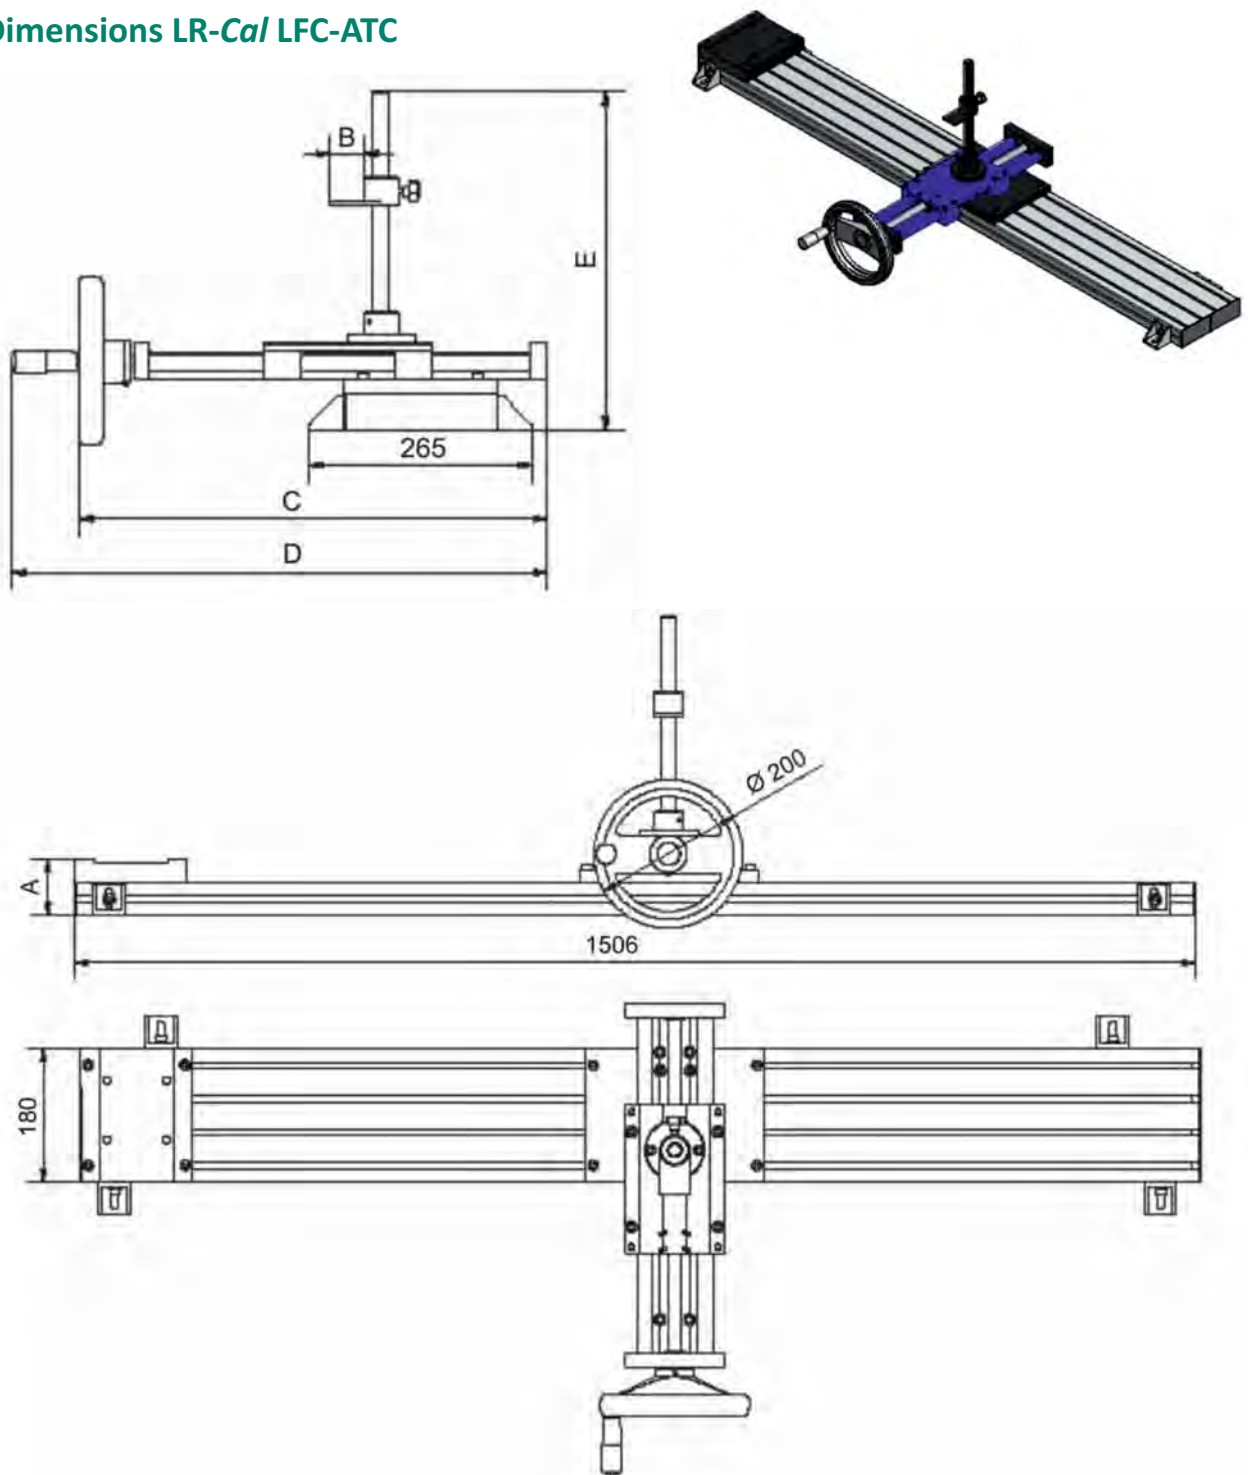

Dimensions LR-Cal/ LFC-ATC


Artikel-Nummer Oder-Code	Max.Bereich Max.Range	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	L [mm]
LFC-ATC-1000	1000 Nm	75	40	554	634	404	1206
LFC-ATC-2000	2000 Nm	120	50	618	698	469	1503

See also: Precision handheld **LR-Cal** LHM with external torque sensor TRS

Ranges 0.5 Nm, 2,5 Nm, 5 Nm, 10 Nm,
25 Nm, 50 Nm, 100 Nm, 250 Nm, 500 Nm
or 1000 Nm.

Accuracy $\pm 0.2\%$ or optional $\pm 0.1\%$.



Further information: datasheet „LHM“.



DRUCK & TEMPERATUR Leitenberger GmbH
Bahnhofstr. 33
D-72138 Kirchentellinsfurt / GERMANY

Tel.: +49 (0) 7121-90920-0

Fax: +49 (0) 7121-90920-99

E-Mail aus Deutschland: DT-Info@Leitenberger.de

E-Mail aus anderen Ländern / E-Mail from outside Germany: DT-Export@Leitenberger.de

Internet: www.druck-temperatur.de